

Air Tight URBAİ Remodel Housings



SUITABLE FOR DAMP LOCATION / WET WITH SHOWER TRIM

For use in insulated material — “IC” Type (except polyurethane)


REUR3-120D1, REUR3-120E1, REUR3-277D1, REUR3-UV1, REUR4-120D1, REUR4-120E1, REUR4-277D1, REUR4-UV1

“NON-IC” Type

REUR3-120D2, REUR3-120E2, REUR3-277D2, REUR3-2772, REUR3-120EB2, REUR3-UV2, REUR4-120D2, REUR4-120E2, REUR4-277D2, REUR4-2772, REUR4-120EB2, REUR4-UV2

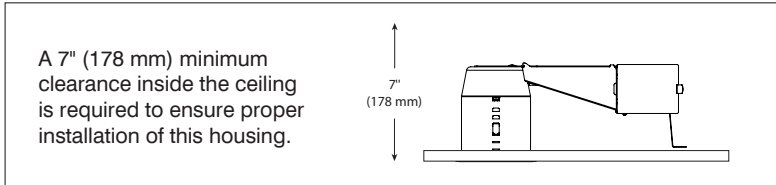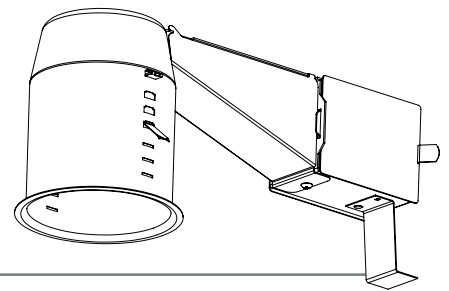


Note: Captive hooks are preinstalled for 1/2" (13 mm) ceiling thickness. Adjustment possibility up to a maximum of 2" (51 mm) ceiling thickness.





Captive hook adjustment holes.

1. SHUT OFF ELECTRICAL SUPPLY AT SOURCE.
2. Bring the electrical wiring to the housing as per applicable local electrical codes.
3. Cut the hole to a diameter of:
REUR3 (3-1/2") Series: ø 3-5/8" (92 mm)
REUR4 (4") Series: ø 4-1/4" (108 mm)
4. Remove the junction box cover by pushing on the spring latch (1).


7. Insert housing through the ceiling opening.

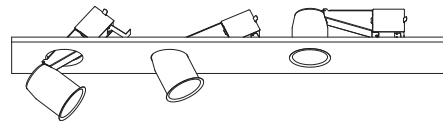

8. Lock the captive hooks and make sure the hooks apply a pressure against the ceiling to maintain the can firmly in place.




Lock the captive hook





Final position of captive hook

5. Connect the wires based on diagrams below. Close the junction box replacing the cover (2).

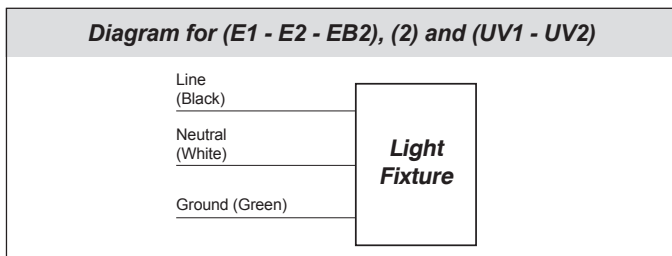

INSTALLATION OF ALUMINUM TAPE


9. Remove the film on the back of the included aluminum tape.
10. Apply the aluminum tape on both sides of the can in order to cover the hooks opening.

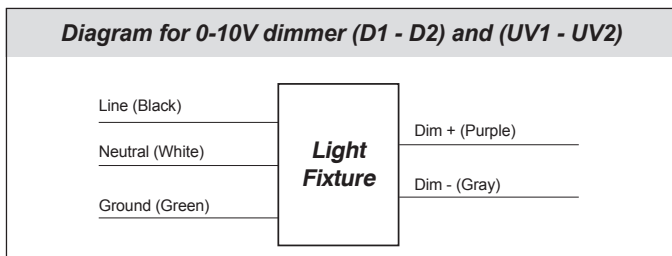



11. Complete the installation.

Connect the male and female connectors.


Push the connected wires in the pot, then push the trim in.



6. Unlock the upper part of the can captive hooks in order to release them. Use the various adjustment holes on each side of the can and adjust the position of the captive hooks according to the ceiling thickness.



Unlock the captive hook



Captive hook insertion position



Please keep these installation instructions for future maintenance.

WARNING
 The use of other company's (non-Contraste) products or components (e. g. trims) in conjunction with Contrast Lighting M.L. Inc. products may not be covered by UL approvals and could be hazardous. Such use automatically voids all Contrast Lighting M.L. Inc. warranty and responsibility of these products.

WARNING: RISK OF FIRE
 Most dwellings built before 1985 have supply wires rated 60° C. Consult a qualified electrician before installing.

Due to constant evolution of dimmers, we must test them regularly. We invite you to frequently visit our web site to find our dimmer compatibility list: www.contrastlighting.com

WARRANTY: CONTRAST LIGHTING M. L. INC. guarantees the components against manufacturing defects for a period of one (1) year, under normal use with proof of purchase. The obligation of the manufacturer consists in the cost of the components and does not cover the cost of labor and transport for replacement. For all claims, please contact your local supplier. See our Web site for additional warranty details. **Note:** 5-years warranty on driver and LED module.