

# SPECIFICATION SHEET

4" 2000 SERIES

# F2450VT

LOW PROFILE TRIM WITH FROSTED GLASS TUBE



**Damp Location** YES



**Compact Fluorescent** 18W, 26W or 32W




**Glass**

Available lengths : 3,4,5,6 and 7" (76,102,122,152 and 178mm).  
Add tube length at the end of the code.

Examples : F2450VT-01-NFF03  
F2450VT-01-NFF04  
F2450VT-01-NFF05  
F2450VT-01-NFF06  
F2450VT-01-NFF07

**Standard glass color : Natural Frosted interior / exterior**  
For other glass colors, contact Customer Service.



ISF2000LU18



NWF2000LU18,26,32



F2000LU18,26,32

## COMPATIBLE HOUSINGS

### 18W CF

F2000LU18  
ISF2000LU18  
NWF2000LU18

### 26W CF

F2000LU26  
NWF2000LU26

### 32W CF

F2000LU32  
NWF2000LU32



## ENERGY STAR Requirements

120 Volt ONLY




This trim meets every ENERGY STAR requirements when combined with the following housings :

F2000LU18      F2000LU26      NWF2000LD26  
NWF2000LU18    NWF2000LU26

## TRIM FINISHES

-01 WHITE	-04BR BRUSHED CHROME	-08 ANTIQUE SILVER
-02 BLACK	-05 ARCHITECTURAL BRONZE	-11 MATTE WHITE
-03 24K GOLD	-06 ANTIQUE COPPER	-12BR BRUSHED NICKEL
-04 CHROME	-07 ANTIQUE BRASS	-13 SATIN NICKEL
		-14 ALMOND

Unless otherwise indicated, trims are for **interior use only**. For exterior use and up to wet conditions, **MARINE GRADE** treatment is **recommended**. Available for finishes -01, -02, -05, -06, -11 and -14 only.

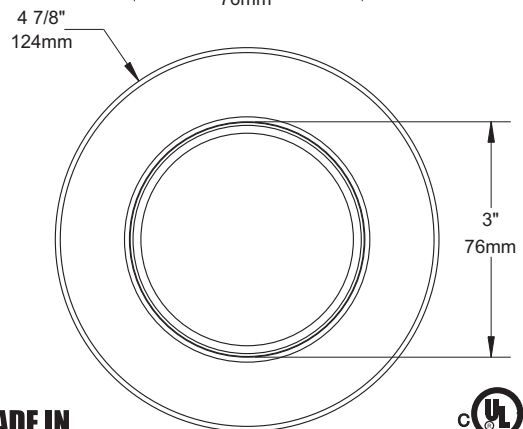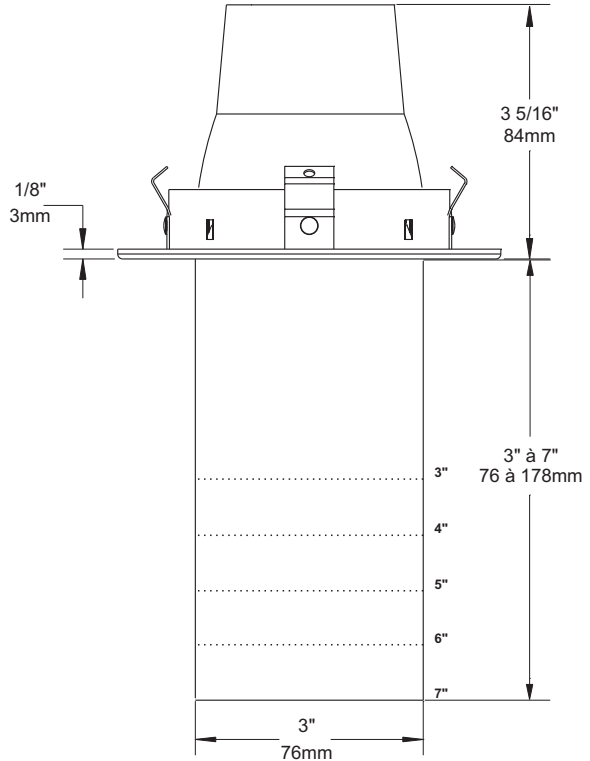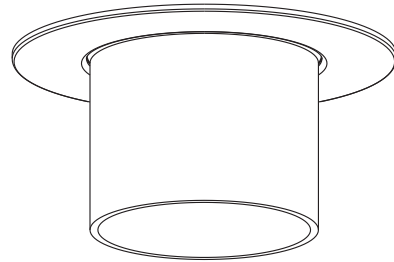

Certified UL Standards

Project \_\_\_\_\_

Representative \_\_\_\_\_

**CONTRAST**  
LIGHTING

1009, rue du Parc Industriel, Saint-Jean-Chrysostome, Qc, CAN G6Z 1C5 Tel.: 1-888-839-4624 Fax : 1-877-839-7057  
info@contrastlighting.com  
www.contrastlighting.com

JUNE 2010