


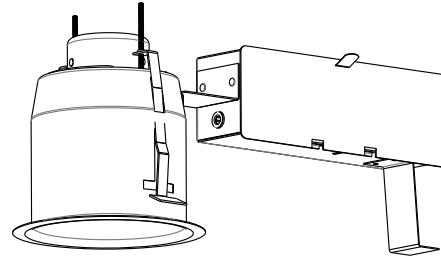







# SPECIFICATION SHEET



4 3/8" 2575 SERIES

# F2575R

**WHITE PAINTED REMODEL HOUSING WITH CLEAR REFLECTOR (NO TRIM REQUIRED)**



	<b>YES</b>
<b>Damp Location</b>	
	<b>1 X 13W 2 PIN DTT</b>
<b>Compact Fluorescent</b>	
	<b>120 VOLTS (CAN &amp; USA.)</b>
<b>Voltage</b>	
	<b>Magnetic Ballast Hi Power Factor</b>
<b>Magnetic Ballast Hi Power Factor</b>	
	<b>4 5/8" (118 mm)</b>
<b>OD Cut</b>	
	<b>E175084</b>
<b>UL LISTED</b>	
	<b>Overall Dimensions:</b> Length: 14 3/8" (375 mm) Width: 5 9/16" (140 mm) Height: 6" (152 mm)
<b>Dimensions</b>	
	<b>Clear Reflector.</b> A Champagne reflector is available. Add «CH» at the end of the code. Ex. : F2575RCH
<b>Reflector</b>	

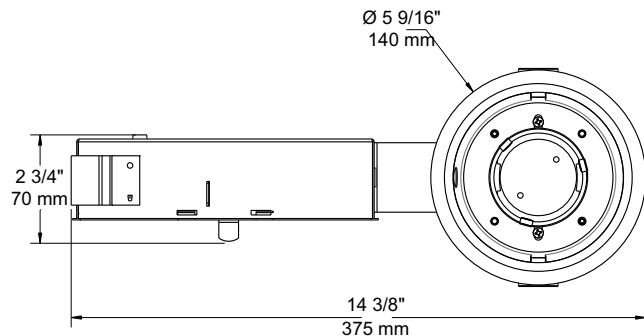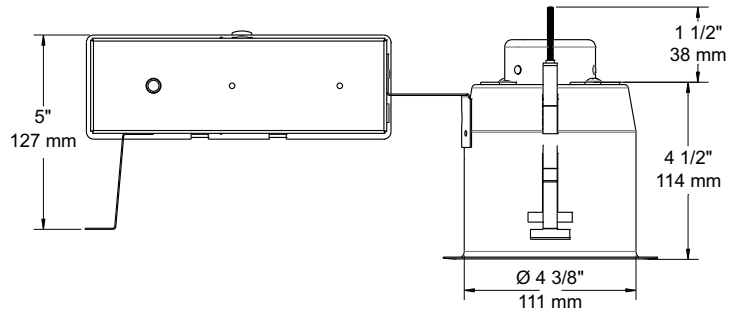

## COMPATIBLE TRIMS AND ACCESSORIES

This is a trimless fixture.

## TECHNICAL SPECIFICATIONS

0.051" (1.3 mm) thickness Galvanized Steel.  
 Below-ceiling accessible.  
 Hooks PAT#CAN 2,088,648 and #USA 5,377,088.  
 Takes up to 7/8" thick ceiling.  
 Perfect fit into ceiling.  
 No light leak.  
 Each part of the case should be at 3 "(76 mm) MINIMUM from insulation (if applicable).



Your representative: \_\_\_\_\_

Your project: \_\_\_\_\_