






4" 2000 SERIES

ISCA2000D

INSULATED HOUSING FOR ADJUSTABLE TRIM

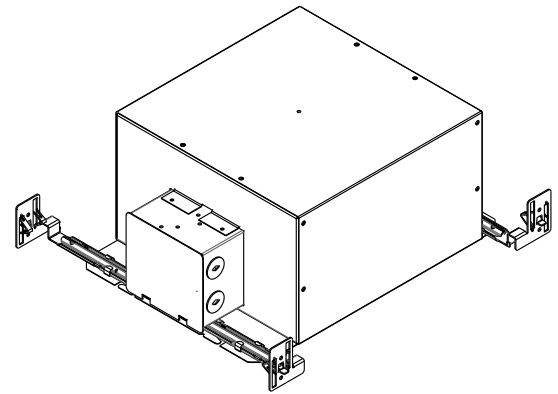

	YES
Damp location	
	PAR20 50W Max.
PAR	
	120 V
Voltage	
	100°C No 027
Thermal Protector	
	4 1/4" (108 mm)
Ceiling cutout	
	E174023
UL LISTED	
	Overall dimensions Length: 15 5/16" (389 mm) Width: 10" (254 mm) Height: 6 1/16" (154 mm)
Dimensions	

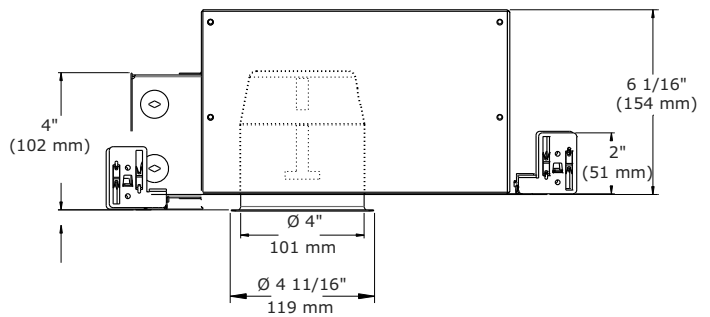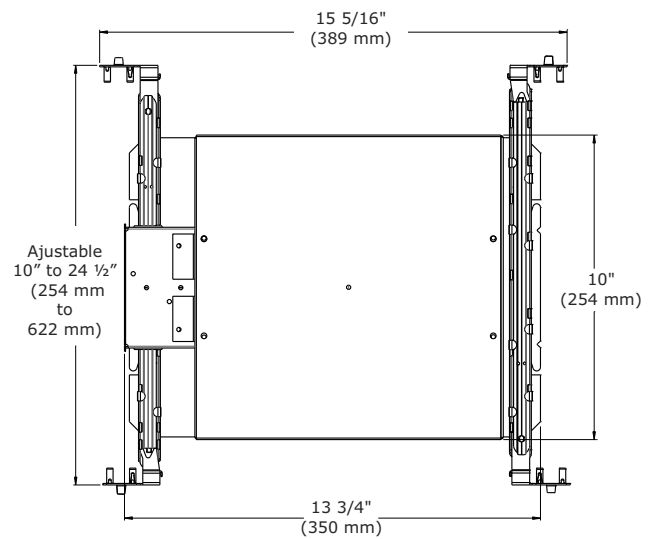

COMPATIBLE TRIMS

D2000

OPTIONS

TITLE 24: For product that meets California Title 24 energy code requirements, add "W" to code: ISCA2000DW
 CHICAGO PLENUM: For product that meets Chicago Plenum requirements, add "P" to code: ISCA2000DP

TECHNICAL SPECIFICATIONS

0.051" (1.3 mm) thickness galvanized steel.
 Below-ceiling accessible.
 Hooks PAT#CAN 2,088,648 and #USA 5,377,088.
 Installs to ceilings up to 7/8" (22 mm) thick.
 Perfect fit into ceiling.
 No light leakage.



Project _____

Representative _____