

ISLD200

4" Series - Concerto & Intermezzo LED

Project	
Notes	
Fixture Type	
Date	

Insulated Housing

SPECIFICATIONS

HOUSING DETAILS Galvanized steel and aluminum housing to optimize heat dissipation, of a thickness up to 18 gauge (0.051" / 1,3 mm).
 Junction box can support up to 10 - 14 gauge wires or 8 - 12 gauge wires (90° wires).
 Below-ceiling accessible.
 Can be installed in insulated ceilings, except polyurethane.

MOUNTING **Cutout diameter: Ø 4-1/4" (108 mm)**
 Perfect fit to ceiling, no light leakage.
 Can fit in ceilings up to 1-1/2" (38 mm) thick.
 Mounting bars extend from 10" (254 mm) to 24-1/2" (622 mm) to fit in most ceiling structures.

PERFORMANCE **Performance 1:** Up to 1,500 lumens (16W) determined by the choice of the trims
Performance 2: Up to 2,000 lumens (23W) determined by the choice of the trims

POWER **ELV:** 120V only
0-10V et PMW: Dual Voltage 120V / 277V



DIMMING 3 types of dimming offered:
 • Electronic Low Voltage (ELV)
 • 0-10V
 • Lutron Hi-Lume A-Series LED Driver with Eco System Control / 3-wire (CCR)

Due to constant evolution of dimmers we must test them regularly.
 We invite you to consult frequently our Web site to find our dimmer compatibility list: www.contrastlighting.com

COMPATIBLE TRIMS	Performance 1	Performance 2
	Concerto	Concerto
	16W	23W
	LD2A	LD2C
	LD2B	LD2F
	LD2C	LD2J
	LD2D	LD2K
	LD2E	
	LD2F	
	LD2J	
	LD2K	

CERTIFICATION • cULus **E343977** for damp and wet locations
 • Chicago Plenum (optional)


WARRANTY 5 years on LED driver.

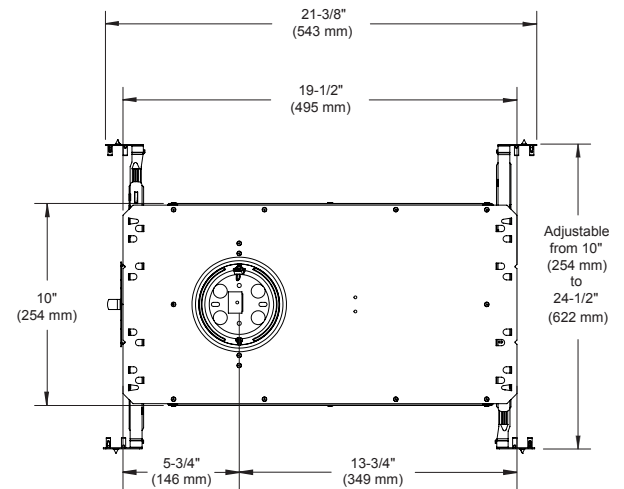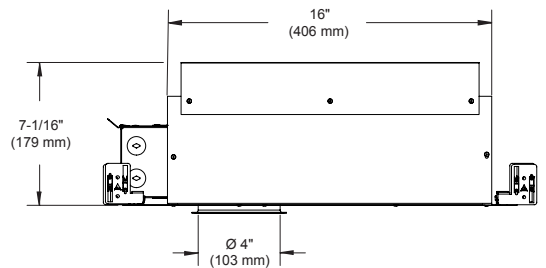

ISLD200

4" Series - Concerto & Intermezzo LED

CODIFICATION EXAMPLE

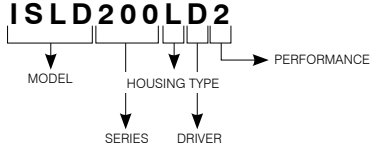

ORDERING CODE

MODEL	SERIES	HOUSING TYPE	DRIVER	PERFORMANCE	COMPLIANCE OPTION
ISLD	200	L			
ISLD Insulated Housing	200 200 Series	L Long	E ELV - 120V Only D 0-10V - Dual Voltage (120V / 277V) A Lutron Hi-Lume A-Series Eco System / 3-wire (CCR) Dual Voltage (120V / 277V)	1 1,500 lumens 2 2,000 lumens	... Standard X Chicago Plenum

* Performance 1 and 2 housings are compatible with performance 2 trims.

