

NWGU2575




4 3/8" GU24 SERIES

White Painted New Construction Housing

Project	
Notes	
Fixture Type	
Date	

SPECIFICATIONS

HOUSING DETAILS	Galvanized steel of 0,051" (1,3 mm) thickness. Below-ceiling accessible.
MOUNTING	Perfect fit into ceiling. No light leak. Hooks PAT#CAN.2.088.648 and #USA. 5.377.088 Fit into up to 1 1/2" (38 mm) ceiling thickness. Ceiling cutout: 4 5/8" (117 mm)
TRIMS AND ACCESSORIES COMPATIBLES	BAFRE2575 (baffle) (-01 White/ -02 Black) C2575 (collar) (All standard finishes are available) REFRE2575 (reflector) (-BK Black / -CH Champagne / -CL Clear) *The C2575 collar requires BAFRE2575 deflector or reflector REFRE2575 to be fixed.
COMPATIBLE LAMP	Compact Fluorescent 23W GU24
VOLTAGE	120-277 Volts (CAN & É.-U.)
CERTIFICATION	cULus Listed for damp location. E175084

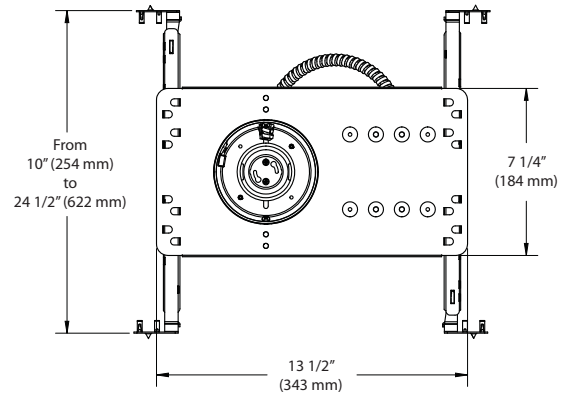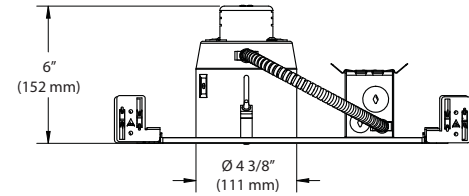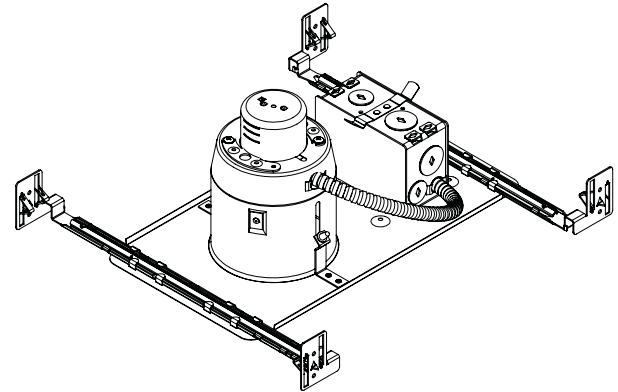

ORDERING CODE for Housing

Example: **NWGU2575-BK**

MODEL	REFLECTOR/BAFFLE	
NWGU2575		
NWGU2575	Specular Reflector	Phenolic Baffle
	BK Black	-01 White
	CH Champagne	-02 Black
	CL Clear	

ORDERING CODE for Trim Collar

Example: **C2575-04**

MODEL	FINISH			
C2575				
C2575	-01 White	-05 Architectural Bronze	-13 Satin Nickel	
	-02 Black	-06 Antique Copper	-14 Almond	
	-03 Gold Plated 24K	-08 Antique Silver	-15 Metallic Grey	
	-04 Chrome	-11 Matte White	-16 Satin Chrome	
	-04BR Brushed Chrome	-12BR Brushed Nickel		

