

NWLD200

4" Series - Concerto & Intermezzo LED

New Construction Housing

SPECIFICATIONS


HOUSING DETAILS	Galvanized steel housing with a thickness up to 18 gauge (0,051" (1,3 mm)). Junction box can support up to 10 - 14 gauge wires or 8 - 12 gauge wires (90° wires). Below-ceiling accessible.																																																						
MOUNTING	Cutout diameter: Ø 4-1/4" (108 mm) Insulated material must be kept at least 3" (76 mm) away from the fixture. Can fit in ceilings up to 1-1/2" (38 mm) thick. Contrast hooks for ease of installation and a perfect fit to ceiling. No light leakage. Mounting bars extend from 10" (254 mm) to 24-1/2" (622 mm) to fit in most ceiling structures.																																																						
PERFORMANCE	Performance 1: Up to 1,500 lumens (16W) determined by the choice of the trims Performance 2: Up to 2,000 lumens (23W) determined by the choice of the trims Performance 3: Up to 2,500 lumens (30W) determined by the choice of the trims																																																						
POWER	ELV: 120V only 0-10V and PWM: Dual Voltage 120V / 277V																																																						
DIMMING	3 types of dimming offered: <ul style="list-style-type: none"> • Electronic Low Voltage (ELV) • 0-10V • Lutron Hi-Lume A-Series LED Driver with Eco System Control / 3-wire (PWM) <p>Due to constant evolution of dimmers we must test them regularly. We invite you to consult frequently our Web site to find our dimmer compatibility list: www.contrastlighting.com</p>																																																						
COMPATIBLE TRIMS	<table border="1"> <thead> <tr> <th colspan="2">NWLD200L E/D/A 1/2</th> <th colspan="2">NWLD200L D/A 3</th> </tr> <tr> <th colspan="2">Performance 1</th> <th colspan="2">Performance 2</th> <th>Performance 3</th> </tr> <tr> <th>Concerto 16W</th> <th>Intermezzo 16W</th> <th>Concerto 23W</th> <th>Intermezzo 23W</th> <th>Concerto 30W</th> </tr> </thead> <tbody> <tr> <td>LD2A</td> <td>INT20PA</td> <td>LD2A</td> <td>INT20PA</td> <td>LD2J</td> </tr> <tr> <td>LD2B</td> <td>INT20PR</td> <td>LD2B</td> <td>INT20PR</td> <td>LD2K</td> </tr> <tr> <td>LD2C</td> <td>INT20PR</td> <td>LD2C</td> <td>INT20PR</td> <td></td> </tr> <tr> <td>LD2D</td> <td>INT21PR</td> <td>LD2D</td> <td>INT21PR</td> <td></td> </tr> <tr> <td>LD2E</td> <td></td> <td>LD2E</td> <td></td> <td></td> </tr> <tr> <td>LD2F</td> <td></td> <td>LD2F</td> <td></td> <td></td> </tr> <tr> <td>LD2J</td> <td></td> <td>LD2J</td> <td></td> <td></td> </tr> <tr> <td>LD2K</td> <td></td> <td>LD2K</td> <td></td> <td></td> </tr> </tbody> </table>	NWLD200L E/D/A 1/2		NWLD200L D/A 3		Performance 1		Performance 2		Performance 3	Concerto 16W	Intermezzo 16W	Concerto 23W	Intermezzo 23W	Concerto 30W	LD2A	INT20PA	LD2A	INT20PA	LD2J	LD2B	INT20PR	LD2B	INT20PR	LD2K	LD2C	INT20PR	LD2C	INT20PR		LD2D	INT21PR	LD2D	INT21PR		LD2E		LD2E			LD2F		LD2F			LD2J		LD2J			LD2K		LD2K		
NWLD200L E/D/A 1/2		NWLD200L D/A 3																																																					
Performance 1		Performance 2		Performance 3																																																			
Concerto 16W	Intermezzo 16W	Concerto 23W	Intermezzo 23W	Concerto 30W																																																			
LD2A	INT20PA	LD2A	INT20PA	LD2J																																																			
LD2B	INT20PR	LD2B	INT20PR	LD2K																																																			
LD2C	INT20PR	LD2C	INT20PR																																																				
LD2D	INT21PR	LD2D	INT21PR																																																				
LD2E		LD2E																																																					
LD2F		LD2F																																																					
LD2J		LD2J																																																					
LD2K		LD2K																																																					
THERMAL PROTECTION	Performance 1: TC 149°F (65°C) Performance 2: TC 176°F (80°C) Performance 3: TC 176°F (80°C)																																																						
CERTIFICATION	• cULus E343977 for damp and wet locations																																																						
WARRANTY	5 years on LED driver.																																																						

Project _____



Notes _____

Fixture Type _____

Date _____

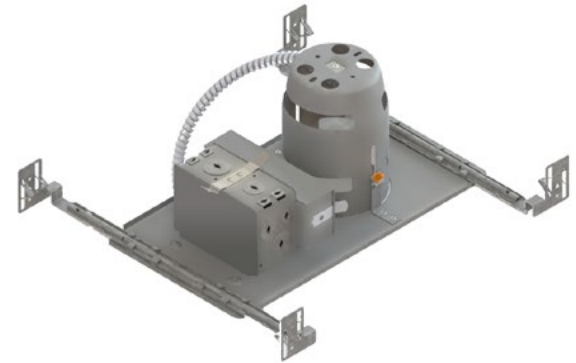


NWLD200L E/D 1/2 (illustrated)

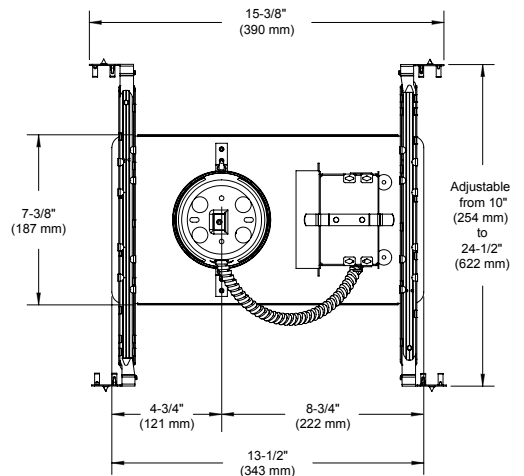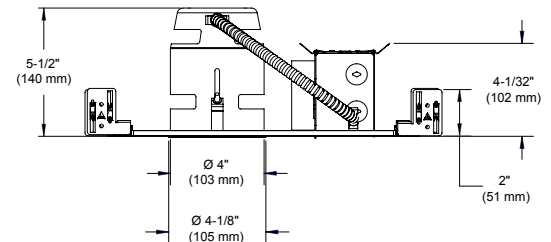

NWLD200

4" Series - Concerto & Intermezzo LED

CODIFICATION EXAMPLE

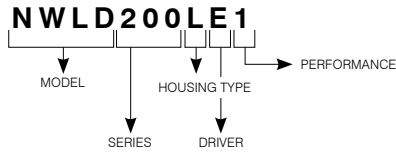

ORDERING CODE

MODEL	SERIES	HOUSING TYPE	DRIVER	PERFORMANCE
NWLD	200	L		
NWLD New Construction Housing	200 200 Series	L Long	E* ELV - 120V Only D 0-10V - Dual Voltage (120V / 277V) A Lutron Hi-Lume A-Series Eco System / 3-wire (PWM) Dual Voltage (120V / 277V)	1 1,500 lumens 2 2,000 lumens 3 2,500 lumens

(*E not available in the performance 3)

**** Performance 1 and 2 housings are compatible with performance 2 trims.
 Performance 3 housings are only compatible with performance 3 trims.**

