

Nina

Project _____

Notes _____

Fixture Type _____

Date _____


DESCRIPTION

Nina Glass Pendants were built with exceptional precision to provide a simple and minimalist form well-suited to most residential and commercial applications. What makes this luminaire distinctive is its flexibility in the number of sources that can be used in this particular shape. Whether the lighting designer is looking for an ecofriendly source, the Nina Pendant offers a solution with five different lamp sources.



CANOPY SPECIFICATIONS

CANOPY




- P1 and P2 are made of gauge 20 cold rolled steel.
- P3, PD1, PDR1, PR1 and PR2 are decorative plates made of gauge 14 and 20 cold rolled steel.

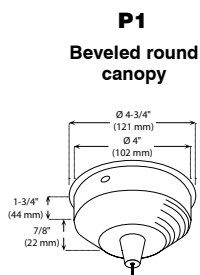


Available in 3 painted colors or 4 plated finishes.

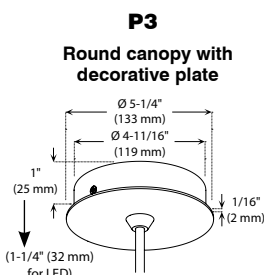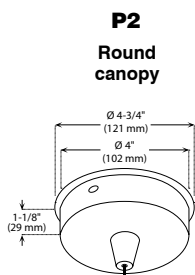

Available in 3 painted colors or 3 plated finishes.

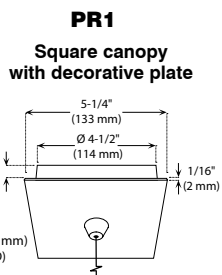

Available in 3 painted colors or 3 plated finishes.

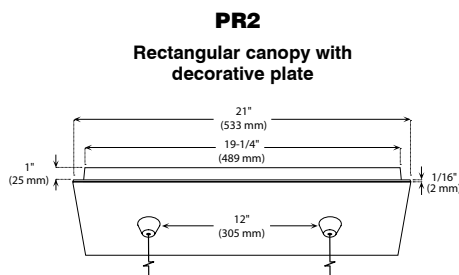

NINAGRSLK (illustrated)

INSTALLATION	These canopies fit in 4" (102 mm) junction boxes.
CABLE AND STEM	<ul style="list-style-type: none"> • Cables offered in standard lengths of 6' (1,829 mm). Custom length up to 10' (3,048 mm) for 12V cable and 20' (6,096 mm) for 120V cable (available upon request). • 5/16" Steel stems matching the canopy color offered in increments from 6" (152 mm) to 48" (1,219 mm).



BI-PIN (GY6.35) AND MR16 SPECIFICATIONS

SOCKET	Universal GY6.35/GX5.3
SOURCE	<p>Low Voltage Halogen Lamps</p> <p>Maximum Wattage: 50W</p> <p>Bi-Pin Lamp (included)</p> <p>Shielded MR16 Lamp (not included)</p>
POWER SUPPLY	<p>120V/12V Electronic converter</p> <p>277V/12V Electronic converter (available only with Bi-Pin and stem)</p>
DIMMING	Compatible with Electronic Low Voltage (ELV) or Incandescent (TRIAC) dimmers
CERTIFICATION	cULus E172892

Nina

**Complete unit consists of:
Canopy + Cable/Stem + Suspension System + Shade**

MED/E26 SPECIFICATIONS

SOCKET	Medium Base E26
SOURCE	120V Line Voltage 100W maximum Lamp (not included)
POWER SUPPLY	120V Line Voltage
DIMMING	Compatible with Incandescent (TRIAC) dimmers
CERTIFICATION	cULus E172892

G9 SPECIFICATIONS (available only with stem)

SOCKET	G9 Base
SOURCE	G9 Line Voltage Lamp (not included)
POWER SUPPLY	120V Line Voltage
DIMMING	Compatible with Incandescent (TRIAC) dimmers
CERTIFICATION	cULus E172892

GU24 SPECIFICATIONS

SOCKET	"Twist and lock" GU24 Base
SOURCE	GU24 Line Voltage Lamp (not included)
POWER SUPPLY	120V Line Voltage
DIMMING	Consult the lamp manufacturer for the compatible dimmer list.
CERTIFICATION	cULus E303743

LED SPECIFICATIONS

INSTALLATION	For PD1 and PDR1 canopies a junction box extension is provided.
CRI	90 +
COLOR TEMPERATURE	2,700K or 3,000K
POWER SUPPLY	Magtech Driver, constant current output.
SOURCE	Bridgelux LED arrays 6W. Delivers a lumen maintenance greater than 70% after 50,000 hours of operation (L70). Provide a clean white light without pixilation and produces high quality true color. Inside 3 steps MacAdam ellipse.
LUMENS OUTPUT	270 lumens, 45 lumens/watt
VOLTAGE	120V
WARRANTY	5 year warranty on the LED module and driver
DIMMING	Dimmable with leading edge/forward phase and trailing edge/reverse phase electronic low voltage dimmers, as well as Incandescent (TRIAC) dimmers. Please see Web site for complete compatibility chart.
CERTIFICATION	cULus E357146



CONTRAST
LIGHTING

2015-07

1009, rue du Parc Industriel
Lévis (Québec) G6Z 1C5 Canada
Tel.: 1-888-839-4624 Fax: 1-877-839-7057
info@contrastlighting.com
www.contrastlighting.com

© 2015 Contrast Lighting M.L. Inc.
All rights reserved

Contrast Lighting reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

Nina


**Complete unit consists of:
Canopy + Cable/Stem + Suspension System + Shade**

SUPPORT

GABY CENTER

Gaby Center made of alloy steel.


TC




THREADED RING (only for LED)

Threaded Ring made of high quality aluminum.


RF



NINA GLASS SHADE

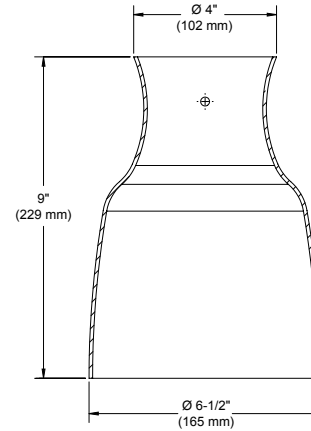

BI-PIN AND MR16 CANOPY CODIFICATION EXAMPLE

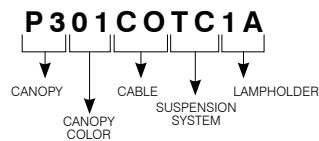

BI-PIN and MR16 Canopy ORDERING CODE


CANOPY	CANOPY COLOR	CABLE OR STEM	SUSPENSION SYSTEM	LAMPHOLDER	VOLTAGE
P1	PAINTED	12V COAXIAL CABLE	TC Gaby Center	1A Bi-Pin and MR16	Standard: 120V/12V
P2	01 White	BK Black			277V/12V
P3	02 Black	CO Metal			
PD1	05 Architectural Bronze				
PDR1		STEM			(Available only with Bi-Pin and stem)
PR1	PLATED	06 06"			
PR2	04 Chrome	12 12"			
	04BR Brushed Chrome	18 18"			
	12BR Brushed Nickel	24 24"			
	13 Satin Nickel	36 36"			
	(Available only with P1 and P2)	48 48"			
		(Stem available only with P1, P2, P3 and PR1)			



Nina

**Complete unit consists of:
Canopy + Cable/Stem + Suspension System + Shade**


MED/E26 CANOPY CODIFICATION EXAMPLE

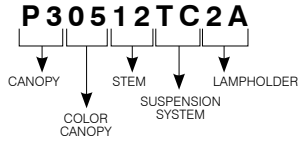

MED/E26 Canopy ORDERING CODE

CANOPY	CANOPY COLOR	CABLE AND STEM	SUSPENSION SYSTEM	LAMPHOLDER
P1	PAINTED	120V CABLE	TC	2A
P2	01 White	STEM	TC Gaby Center	2A MED/E26
P3	02 Black	BK Black		
PD1	05 Architectural Bronze	WH White		
PDR1				
PR1	PLATED	FABRIC		
PR2	04 Chrome	BKT Black		
	04BR Brushed Chrome	ST Silver		
	12BR Brushed Nickel	OT Orange		
	13 Satin Nickel	RT Red		
	(Available only with P1 and P2)	BRT Brown	(Stem available only with P1, P2, P3 and PR1)	
		BBT Brown/Beige		

G9 CANOPY CODIFICATION EXAMPLE

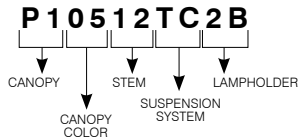

G9 Canopy ORDERING CODE


CANOPY	CANOPY COLOR	STEM	SUSPENSION SYSTEM	LAMPHOLDER
P1	PAINTED	STEM	TC	2B
P2	01 White	06 06"	TC Gaby Center	2B G9
PR1	02 Black	12 12"		
	05 Architectural Bronze	18 18"		
		24 24"		
	PLATED	36 36"		
	04 Chrome	48 48"		
	04BR Brushed Chrome			
	12BR Brushed Nickel			
	13 Satin Nickel			
	(Available only with P1 and P2)			



Nina

**Complete unit consists of:
Canopy + Cable/Stem + Suspension System + Shade**


GU24 CANOPY CODIFICATION EXAMPLE

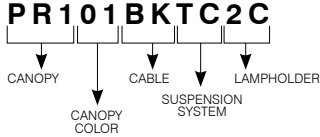

GU24 Canopy ORDERING CODE

CANOPY	CANOPY COLOR	CABLE OR STEM	SUSPENSION SYSTEM	LAMPHOLDER
P3	PAINT	120V CABLE	TC	2C
PD1	01 White	BK Black	TC Gaby Center	2C GU24
PDR1	02 Black	WH White		
PR1	05 Architectural Bronze	FABRIC		
	PLATED	06 06"		
	04BR Brushed Chrome	12 12"		
	12BR Brushed Nickel	18 18"		
	13 Satin Nickel	24 24"		
		36 36"		
		48 48"		
		(Stem available only with P3 and PR1)		
		BKT Black		
		ST Silver		
		OT Orange		
		RT Red		
		BRT Brown		
		BBT Brown/Beige		

LED CANOPY CODIFICATION EXAMPLE

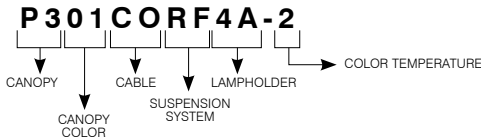

LED Canopy ORDERING CODE


CANOPY	CANOPY COLOR	CABLE OR STEM	PENDANT SUPPORT	LAMPHOLDER	COLOR TEMPERATURE
P3	PAINT	CABLE	RF	4A	
PD1	01 White	BK Black	RF Threaded Ring	4A LED	-2 2,700K
PDR1	02 Black	CO Metal			-3 3,000K
PR1	05 Architectural Bronze	STEM			
	PLATED	06 06"			
	04BR Brushed Chrome	12 12"			
	12BR Brushed Nickel	18 18"			
	13 Satin Nickel	24 24"			
		36 36"			
		48 48"			
		(Stem available only with P3 and PR1)			



Nina

**Complete unit consists of:
Canopy + Cable/Stem + Suspension System + Shade**

GLASS SHADE CODIFICATION EXAMPLE



Glass Shade ORDERING CODE

SHADE	COLOR	TEXTURE	ASPECTS (Available only with clear texture)	PINS
NINA				
NINA	BLS	Smoked Blue	C Clear	A4 Bubbly A6 Granite ... Standard -TM Steel pins (only with LED source)
	GRS	Smoked Grey	F Frosted interior	
	M	Smoked Amber	FF Frosted interior/exterior	
	R	Red	ICE Ice LK Lake SW Snow	
N	Natural	C Clear FF Frosted interior/exterior ICE Ice LK Lake SW Snow	A4 Bubbly A6 Granite	
BK	Black	...	Standard: White interior/Glossy exterior	
CAP	Cappuccino	FF	Frosted interior/exterior	
CHO	Chocolate			
FUR	Furia			
NEP	Neptune			
W	White			
EVA	Eva	C	Clear	
VAN	Vanilla	F	Frosted interior	
		FF	Frosted interior/exterior	

