


PROF41

4" Profilux Series

Complete Unit: LED Square Downlight Trim including the Junction Box and Driver

Project _____
 Notes _____
 Fixture Type _____
 Date _____


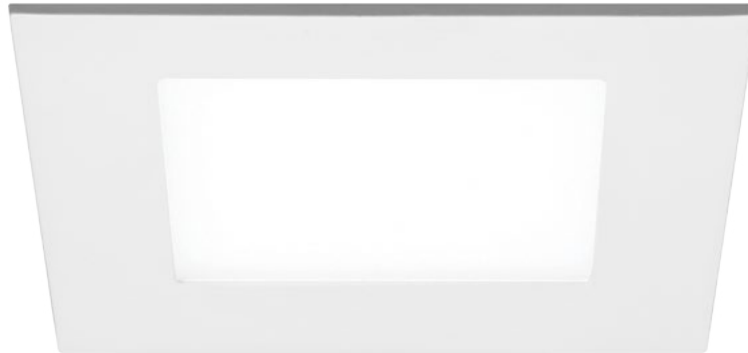


PROF41-11xx (illustrated)

Recessed ultra-thin Air Tight LED trim for insulated ceiling and suitable for wet locations. The thin profile with spring clips allows for quick and easy installation. Ideal for confined spaces.

SPECIFICATIONS

COLOR TEMPERATURES	3,000K and 4,000K
CRI	80+
LED MODULE	Epistar 2835 - Meets ANSI CCT binning requirements
VOLTAGE	120 VAC
POWER	9 Watts
POWER FACTOR	>85%
LUMEN OUTPUT	Up to 650 lumens, 72 lm/W
LIFESPAN	L70 @ 50,000 hours
TRIM	Thin profile lower than 1-3/16" (30 mm) Matte White (-11) or Brushed Nickel (-12BR) available.
BEAM	Very Wide Flood → 110°
WIRE TYPE	FT4
MOUNTING	The space required beyond ceiling material is 1-1/2" (38 mm). The maximal thickness of the ceiling is 1" (25 mm). Beyond this thickness, springs will apply less pressure between the trim and the ceiling. The base of the trim will thus have some difficulty to fit perfectly with the ceiling.

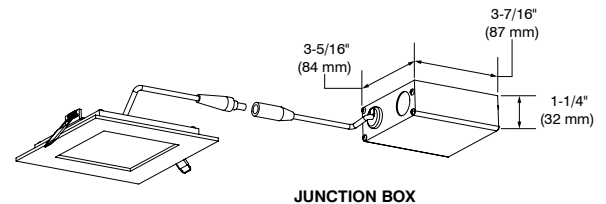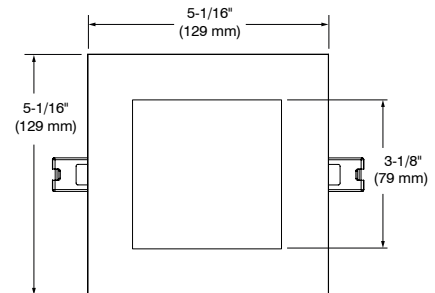

CONTRASTE

1009, rue du Parc Industriel
 Lévis (Québec) G6Z 1C5 Canada
 Tel.: 1-888-839-4624
 Fax.: 1-877-839-7057
 contrastlighting.com
 info@contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.
 All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

PROF41

4" Profilux Series


Complete Unit: LED Square Downlight Trim including the Junction Box and Driver



SPECIFICATIONS (CON'T)

CEILING CUTOUT	4-1/4" (108 mm) x 4-1/4" (108 mm) MIN 4-1/16" (103 mm) x 4-1/16" (103 mm) / MAX 4-7/8" (124 mm) x 4-7/8" (124 mm)
JUNCTION BOX	Junction box with independent auxiliary connection including driver.
DIMMING	Compatible with Electronic Low Voltage (ELV) and Incandescent (TRIAC) dimmers. We invite you to consult frequently our Web site to find our suggested compatible dimmers list: www.contrastlighting.com
OPTIONS	<ul style="list-style-type: none"> • 6' (2 m) and 20' (6 m) cable (see ordering code) • Mounting Plate (see ordering code)
CERTIFICATION	<ul style="list-style-type: none"> • Certified ETL for wet locations • Certified ASTM E283 Air Tight • Certified Energy Star®
WARRANTY	5-year warranty

CODIFICATION EXAMPLE

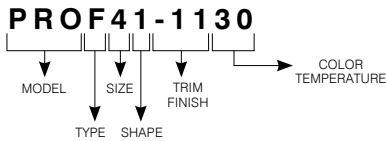

ORDERING CODE

MODEL	TYPE	SIZE	SHAPE	TRIM FINISHES	COLOR TEMPERATURES
PRO	F	4	1		
PRO Profilux	F Downlight	4 4 inches	1 Square	-11 Matte White -12BR Brushed Nickel	30 3,000K 40 4,000K

CONTRASTE

1009, rue du Parc Industriel
Lévis (Québec) G6Z 1C5 Canada
Tel.: 1-888-839-4624
Fax.: 1-877-839-7057
contrastlighting.com
info@contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

PROF41

4" Profilux Series

Complete Unit: LED Square Downlight Trim including the Junction Box and Driver

Project _____

Notes _____



Fixture Type _____

Date _____



MOUNTING PLATE OPTION

Code: P4SN (without bars)
P4SNW (with bars)

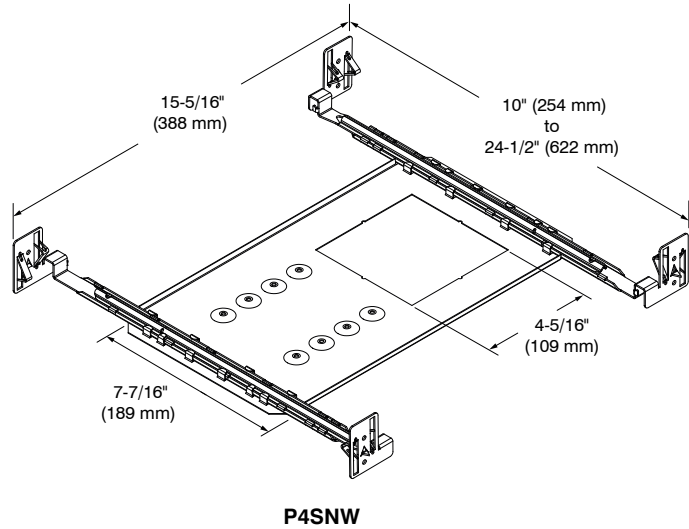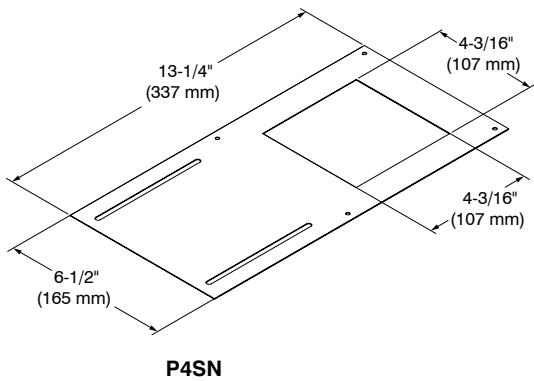

CABLE OPTION

Code: PRO-CBL6 (6' (2 m))
PRO-CBL20 (20' (6 m))

CONTRASTE

1009, rue du Parc Industriel
Lévis (Québec) G6Z 1C5 Canada
Tel.: 1-888-839-4624
Fax.: 1-877-839-7057
contrastlighting.com
info@contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.