

# PROF60

6" Profilux Series

**Complete Unit: LED Round Downlight Trim  
including the Junction Box and Driver**

Project \_\_\_\_\_

Notes \_\_\_\_\_

Fixture Type \_\_\_\_\_

Date \_\_\_\_\_





PROF60-11xx (illustrated)

Recessed ultra-thin Air Tight LED trim for insulated ceiling and suitable for wet locations. The thin profile with spring clips allows for quick and easy installation. Ideal for confined spaces.

## SPECIFICATIONS

COLOR TEMPERATURES	3,000K and 4,000K
CRI	80+
LED MODULE	Epistar 2835 - Meets ANSI CCT binning requirements
VOLTAGE	120 VAC
POWER	12 Watts
POWER FACTOR	>85%
LUMEN OUTPUT	Up to 930 lumens, 78 lm/W
LIFESPAN	L70 @ 50,000 hours
TRIM	Thin profile 1-1/8" (28 mm) Matte White <b>(-11)</b> or Brushed Nickel <b>(-12BR)</b> available.
BEAM	Very Wide Flood → 110°
WIRE TYPE	FT4

**MOUNTING**  
The space required beyond ceiling material is 1-1/2" (38 mm). The maximal thickness of the ceiling is 1" (25 mm). Beyond this thickness, springs will apply less pressure between the trim and the ceiling. The base of the trim will thus have some difficulty to fit perfectly with the ceiling.

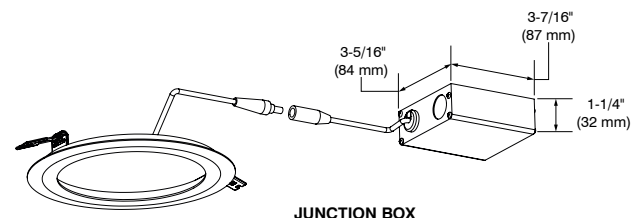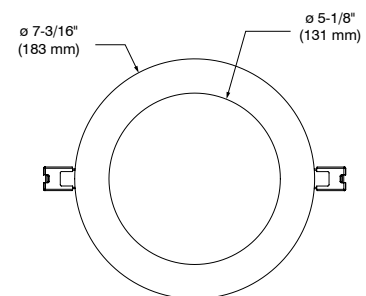

# CONTRASTE

1009, rue du Parc Industriel  
Lévis (Québec) G6Z 1C5 Canada  
Tel.: 1-888-839-4624  
Fax.: 1-877-839-7057  
contrastlighting.com  
info@contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.  
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

# PROF60

## 6" Profilux Series


### Complete Unit: LED Round Downlight Trim including the Junction Box and Driver



#### SPECIFICATIONS (CON'T)

CEILING CUTOUT	<b>ø 6-1/4" (159 mm)</b> MIN ø 6-1/8" (156 mm) / MAX ø 7" (178 mm)
JUNCTION BOX	Junction box with independent auxiliary connection including driver.
DIMMING	Compatible with Electronic Low Voltage (ELV) and Incandescent (TRIAC) dimmers. We invite you to consult frequently our Web site to find our suggested compatible dimmers list: <a href="http://www.contrastlighting.com">www.contrastlighting.com</a>
OPTIONS	<ul style="list-style-type: none"> <li>• 6' (2 m) and 20' (6 m) cable (see ordering code)</li> <li>• Mounting Plate (see ordering code)</li> <li>• Goof Rings (see ordering code)</li> </ul>
CERTIFICATION	<ul style="list-style-type: none"> <li>• Certified ETL for wet locations</li> <li>• Certified ASTM E283 Air Tight</li> <li>• Certified Energy Star®</li> </ul>
WARRANTY	5-year warranty

#### CODIFICATION EXAMPLE

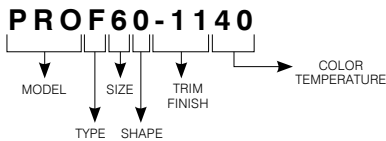

#### ORDERING CODE

MODEL	TYPE	SIZE	SHAPE	TRIM FINISHES	COLOR TEMPERATURES
<b>PRO</b>	<b>F</b>	<b>6</b>	<b>0</b>		
<b>PRO</b> Profilux	<b>F</b> Downlight	<b>6</b> 6 inches	<b>0</b> Round	<b>-11</b> Matte White <b>-12BR</b> Brushed Nickel	<b>30</b> 3,000K <b>40</b> 4,000K

# CONTRASTE

1009, rue du Parc Industriel  
Lévis (Québec) G6Z 1C5 Canada  
Tel.: 1-888-839-4624  
Fax.: 1-877-839-7057  
contrastlighting.com  
info@contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.  
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

# PROF60

6" Profilux Series

**Complete Unit: LED Round Downlight Trim including the Junction Box and Driver**

Project \_\_\_\_\_

Notes \_\_\_\_\_



Fixture Type \_\_\_\_\_

Date \_\_\_\_\_



## MOUNTING PLATE OPTION

**Code:** P6RN (without bars)  
P6RNW (with bars)

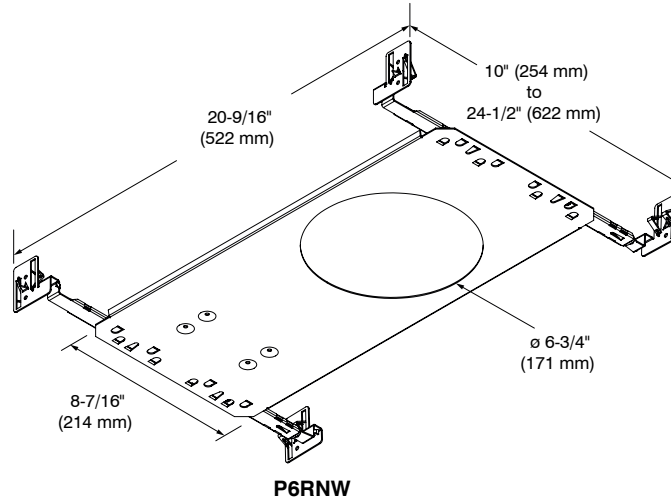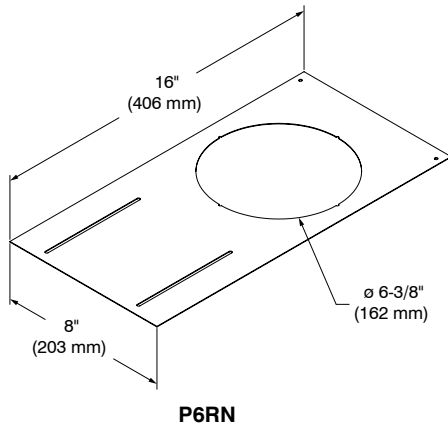

## GOOF RINGS OPTION

**Code:** RR6-11 (Matte White)  
RR6-12BR (Brushed Nickel)

Outside diameter:  $\varnothing$  8" (203 mm)  
Inside diameter:  $\varnothing$  6-3/8" (162 mm)

## CABLE OPTION

**Code:** PRO-CBL6 (6' (2 m))  
PRO-CBL20 (20' (6 m))

# CONTRASTE

1009, rue du Parc Industriel  
Lévis (Québec) G6Z 1C5 Canada  
Tel.: 1-888-839-4624  
Fax.: 1-877-839-7057  
contrastlighting.com  
info@contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.  
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.