

Glass Shade 40




Project _____
 Notes _____
 Fixture Type _____
 Date _____

DESCRIPTION

No matter where it is located, this shape of mouth blown glass of the highest quality guarantees to give out a decorative effect by playing with the light. Endless combinations of shapes, colors and textures allow to create a luminaire adapted to your needs.

CANOPY SPECIFICATIONS

- CANOPY
- P1 and P2 are made of gauge 20 cold rolled steel.
 - P3, PD1, PDR1, PR1, PR2, PCF3 and PCFR1 are decorative plates made of gauge 14 and 20 cold rolled steel.

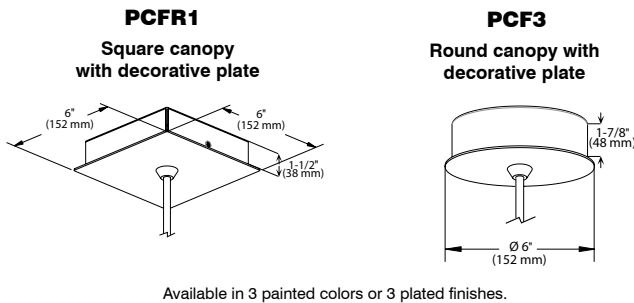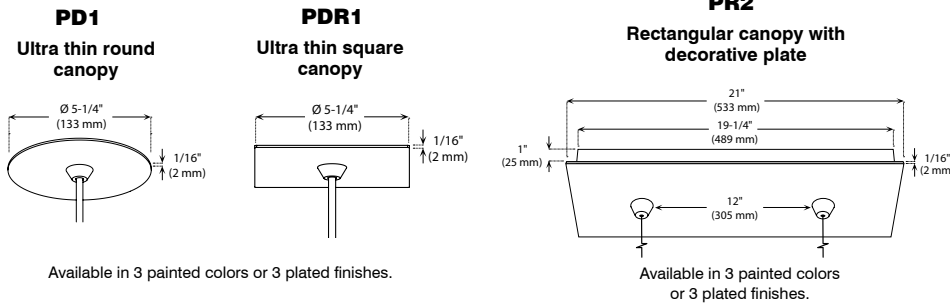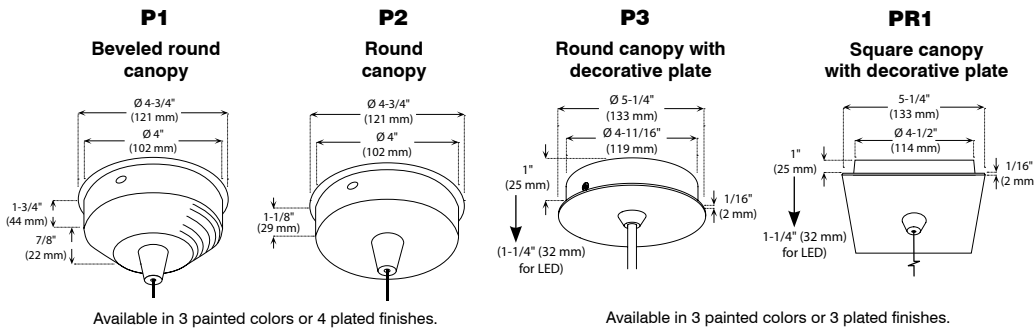

PS4018GBLSFF (Illustrated)

INSTALLATION These canopies fit in 4" (102 mm) junction boxes.

- CABLE AND STEM**
- Cables offered in standard lengths of 6' (1,829 mm). Custom length up to 10' (3,048 mm) for 12V cable and 20' (6,096 mm) for 120V cable (available upon request).
 - 5/16" Steel stems matching the canopy color offered in increments from 6" (152 mm) to 48" (1,219 mm).



Glass Shade 40

**Complete unit consists of:
Canopy + Cable/Stem + Suspension System + Shade**

BI-PIN (GY6.35) AND MR16 SPECIFICATIONS

| | |
|---------------|--|
| SOCKET | Universal GY6.35/GX5.3 |
| SOURCE | Low Voltage Halogen Lamps Maximum Wattage: 50W Bi-Pin Lamp (included) Shielded MR16 Lamp (not included) |
| POWER SUPPLY | 120V/12V Electronic converter 277V/12V Electronic converter (available only with Bi-Pin and stem) |
| DIMMING | Compatible with Electronic Low Voltage (ELV) or Incandescent (TRIAC) dimmers |
| CERTIFICATION | cULus E172892 |

MED/E26 SPECIFICATIONS

| | |
|---------------|--|
| SOCKET | Medium Base E26 |
| SOURCE | 120V Line Voltage 100W maximum Lamp (not included) |
| POWER SUPPLY | 120V Line Voltage |
| DIMMING | Compatible with Incandescent (TRIAC) dimmers |
| CERTIFICATION | cULus E172892 |

G9 SPECIFICATIONS (available only with stem)

| | |
|---------------|--|
| SOCKET | G9 Base |
| SOURCE | G9 Line Voltage Lamp (not included) |
| POWER SUPPLY | 120V Line Voltage |
| DIMMING | Compatible with Incandescent (TRIAC) dimmers |
| CERTIFICATION | cULus E172892 |

GU24 SPECIFICATIONS

| | |
|---------------|---|
| SOCKET | "Twist and lock" GU24 Base |
| SOURCE | GU24 Line Voltage Lamp (not included) |
| POWER SUPPLY | 120V Line Voltage |
| DIMMING | Consult the lamp manufacturer for the compatible dimmer list. |
| CERTIFICATION | cULus E303743 |



CONTRAST
L I G H T I N G

2015-07

1009, rue du Parc Industriel
Lévis (Québec) G6Z 1C5 Canada
Tel.: 1-888-839-4624 Fax: 1-877-839-7057
info@contrastlighting.com
www.contrastlighting.com

© 2015 Contrast Lighting M.L. Inc.
All rights reserved

Contrast Lighting reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

Glass Shade 40

**Complete unit consists of:
Canopy + Cable/Stem + Suspension System + Shade**

FLUORESCENT SPECIFICATIONS

| | |
|---------------|--|
| SOURCE | Compact Fluorescent Lamps 13W, 18W, 26W and 32W (not included) |
| POWER SUPPLY | 120V/277V Universal Electronic Ballast |
| DIMMING | No dimming available |
| CERTIFICATION | cULus E303743 |


LED SPECIFICATIONS

| | |
|-------------------|--|
| INSTALLATION | For PD1 and PDR1 canopies a junction box extension is provided. |
| CRI | 90 + |
| COLOR TEMPERATURE | 2,700K or 3,000K |
| POWER SUPPLY | Magtech Driver, constant current output. |
| SOURCE | Bridgelux LED arrays 6W. Delivers a lumen maintenance greater than 70% after 50,000 hours of operation (L70). Provide a clean white light without pixilation and produces high quality true color. Inside 3 steps MacAdam ellipse. |
| LUMENS OUTPUT | 270 lumens, 45 lumens/watt |
| VOLTAGE | 120V |
| WARRANTY | 5 year warranty on the LED module and driver |
| DIMMING | Dimmable with leading edge/forward phase and trailing edge/reverse phase electronic low voltage dimmers, as well as Incandescent (TRIAC) dimmers. Please see Web site for complete compatibility chart. |
| CERTIFICATION | cULus E357146 |

SUPPORT


GABY CENTER Gaby Center made of alloy steel.

TC




THREADED RING (only for LED) Threaded Ring made of high quality aluminum.

RF



DIMENSIONS FOR 40

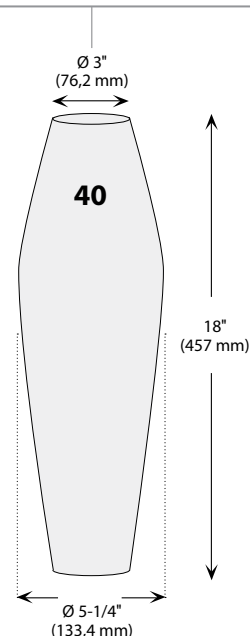

CONTRAST
LIGHTING

2015-07

1009, rue du Parc Industriel
Lévis (Québec) G6Z 1C5 Canada
Tel.: 1-888-839-4624 Fax: 1-877-839-7057
info@contrastlighting.com
www.contrastlighting.com


© 2015 Contrast Lighting M.L. Inc.
All rights reserved

Contrast Lighting reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

Glass Shade 40

**Complete unit consists of:
Canopy + Cable/Stem + Suspension System + Shade**


BI-PIN AND MR16 CANOPY CODIFICATION EXAMPLE

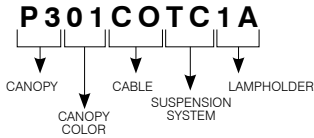

BI-PIN and MR16 Canopy ORDERING CODE

| CANOPY | CANOPY COLOR | CABLE OR STEM | SUSPENSION SYSTEM | LAMPHOLDER | VOLTAGE |
|-------------|---------------------------------|---|-----------------------|---------------------------|---------------------------------------|
| P1 | PAINTED | 12V COAXIAL CABLE | TC Gaby Center | 1A Bi-Pin and MR16 | Standard: 120V/12V 277V/12V |
| P2 | 01 White | BK Black | | | |
| P3 | 02 Black | CO Metal | | | |
| PD1 | 05 Architectural Bronze | | | | |
| PDR1 | | STEM | | | |
| PR1 | PLATED | 06 06" | | | |
| PR2 | 04 Chrome | 12 12" | | | |
| | 04BR Brushed Chrome | 18 18" | | | |
| | 12BR Brushed Nickel | 24 24" | | | |
| | 13 Satin Nickel | 36 36" | | | |
| | | 48 48" | | | |
| | (Available only with P1 and P2) | (Stem available only with P1, P2, P3 and PR1) | | | (Available only with Bi-Pin and stem) |

MED/E26 CANOPY CODIFICATION EXAMPLE

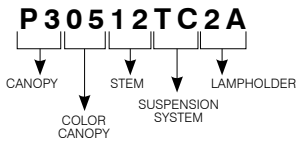

MED/E26 Canopy ORDERING CODE


| CANOPY | CANOPY COLOR | CABLE AND STEM | SUSPENSION SYSTEM | LAMPHOLDER |
|-------------|---------------------------------|---|-----------------------|-------------------|
| P1 | PAINTED | 120V CABLE | TC Gaby Center | 2A MED/E26 |
| P2 | 01 White | BK Black | | |
| P3 | 02 Black | WH White | | |
| PD1 | 05 Architectural Bronze | | | |
| PDR1 | | FABRIC | | |
| PR1 | PLATED | BKT Black | | |
| PR2 | 04 Chrome | ST Silver | | |
| | 04BR Brushed Chrome | OT Orange | | |
| | 12BR Brushed Nickel | RT Red | | |
| | 13 Satin Nickel | BRT Brown | | |
| | (Available only with P1 and P2) | BBT Brown/Beige | | |
| | | (Stem available only with P1, P2, P3 and PR1) | | |



Glass Shade 40

**Complete unit consists of:
Canopy + Cable/Stem + Suspension System + Shade**


G9 CANOPY CODIFICATION EXAMPLE

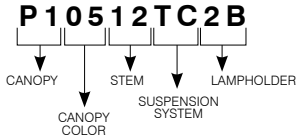

G9 Canopy ORDERING CODE

| CANOPY | CANOPY COLOR | STEM | SUSPENSION SYSTEM | LAMPHOLDER |
|------------|---------------------------------|---------------|-----------------------|--------------|
| P1 | PAINTED | STEM | TC Gaby Center | 2B G9 |
| P2 | 01 White | 06 06" | | |
| PR1 | 02 Black | 12 12" | | |
| | 05 Architectural Bronze | 18 18" | | |
| | | 24 24" | | |
| | | 36 36" | | |
| | | 48 48" | | |
| | PLATED | | | |
| | 04 Chrome | | | |
| | 04BR Brushed Chrome | | | |
| | 12BR Brushed Nickel | | | |
| | 13 Satin Nickel | | | |
| | (Available only with P1 and P2) | | | |

GU24 CANOPY CODIFICATION EXAMPLE

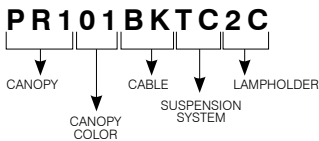

GU24 Canopy ORDERING CODE


| CANOPY | CANOPY COLOR | CABLE OR STEM | SUSPENSION SYSTEM | LAMPHOLDER |
|-------------|--------------------------------|---------------------------------------|-----------------------|----------------|
| P3 | PAINT | 120V CABLE | TC Gaby Center | 2C GU24 |
| PD1 | 01 White | BK Black | | |
| PDR1 | 02 Black | WH White | | |
| PR1 | 05 Architectural Bronze | | | |
| | | STEM | | |
| | | 06 06" | | |
| | | 12 12" | | |
| | | 18 18" | | |
| | | 24 24" | | |
| | | 36 36" | | |
| | | 48 48" | | |
| | PLATED | FABRIC | | |
| | 04BR Brushed Chrome | BK Black | | |
| | 12BR Brushed Nickel | ST Silver | | |
| | 13 Satin Nickel | OT Orange | | |
| | | RT Red | | |
| | | BRT Brown | | |
| | | BBT Brown/Beige | | |
| | | (Stem available only with P3 and PR1) | | |



Glass Shade 40

Complete unit consists of:
Canopy + Cable/Stem + Suspension System + Shade


FLUORESCENT CANOPY CODIFICATION EXAMPLE

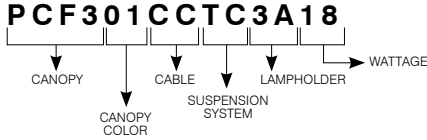

Fluorescent Canopy ORDERING CODE

| CANOPY | CANOPY COLOR | CABLE AND STEM | SUSPENSION SYSTEM | LAMPHOLDER | WATTAGE |
|-----------------------------|--------------------------------|-----------------|-----------------------|-------------------------------|---|
| PCFR1 PCF3 | PAINT | CABLE | TC | 3A | |
| | 01 White | BK Black | TC Gaby Center | 3A Compact Fluorescent | 13 13W DTT G24q-1 |
| | 02 Black | CC Clear | | | 18 18W DTT G24q-2 18W TTT GX24q-2 |
| | 05 Architectural Bronze | | | | |
| | PLATED | STEM | | | 42 26W DTT G24q-3 26W TTT GX24q-3 32W TTT GX24q-3 42W TTT GX24q-4 |
| | 04BR Brushed Chrome | 06 06" | | | |
| | 12BR Brushed Nickel | 12 12" | | | |
| | 13 Satin Nickel | 18 18" | | | |
| | | 24 24" | | | |
| | | 36 36" | | | |
| | | 48 48" | | | |

LED CANOPY CODIFICATION EXAMPLE

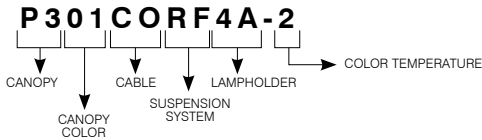

LED Canopy ORDERING CODE

| CANOPY | CANOPY COLOR | CABLE OR STEM | SUSPENSION SYSTEM | LAMPHOLDER | COLOR TEMPERATURE |
|-------------|--------------------------------|-----------------|-------------------------|---------------|-------------------|
| P3 | PAINT | CABLE | RF | 4A | |
| PD1 | 01 White | BK Black | RF Threaded Ring | 4A LED | -2 2,700K |
| PDR1 | 02 Black | CO Metal | | | -3 3,000K |
| PR1 | 05 Architectural Bronze | | | | |
| | PLATED | STEM | | | |
| | 04BR Brushed Chrome | 06 06" | | | |
| | 12BR Brushed Nickel | 12 12" | | | |
| | 13 Satin Nickel | 18 18" | | | |
| | | 24 24" | | | |
| | | 36 36" | | | |
| | | 48 48" | | | |


(Stem available only with P3 and PR1)



Glass Shade 40

**Complete unit consists of:
Canopy + Cable/Stem + Suspension System + Shade**

GLASS SHADE CODIFICATION EXAMPLE

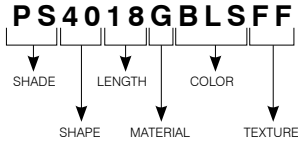

Glass Shade ORDERING CODE

| SHAPE | SHADE | LENGTH | MATERIAL | COLOR | TEXTURE | STEM |
|-----------|-----------|-----------|----------|---|---|---|
| PS | 40 | 18 | G | | | |
| PS | 40 | 18 | G Glass | BLS Smoked Blue GRS Smoked Grey M Smoked Amber | C Clear FF Frosted interior/exterior ICE Ice LK Lake SW Snow STR Striped | ... Standard -TM Steel pins (Only with LED) |
| | | | | R Red | C Clear FF Frosted interior/exterior ICE Ice LK Lake SW Snow | |
| | | | | N Natural | C Clear FF Frosted interior/exterior ICE Ice LK Lake SW Snow STR Striped | |
| | | | | CAP Cappuccino CHO Chocolate FUR Furia NEP Neptune W White | ... Standard : White interior/ Glossy exterior FF Frosted interior/exterior | |
| | | | | EVA Eva VAN Vanilla | C Clear FF Frosted interior/exterior | |

