

Drop

Project _____

Notes _____

Fixture Type _____

Date _____

LED Recessed Downlight



DROP-Wx-30
(Illustrated)

Only available in the Americas.

Drop recessed LED downlight emits soft and extraordinary natural light. With its aluminum trim and its different performance ranges, Drop is the ideal product for a comfortable ambiance.

SPECIFICATIONS

COLOR TEMPERATURE	3,000K
CRI	90 +
VOLTAGE	120V-277V Line Voltage
LIFESPAN	50,000 hours
PERFORMANCE	Performance 1: 20W - 2,040 lumens Performance 2: 31W - 3,140 lumens Performance 3: 39W - 3,930 lumens ies file available on www.contrastlighting.com
TRIM MATERIAL	Painted aluminum
LENS	PMMA (Polymethyl Methacrylate)
BEAM ANGLE	100°
UGR	21.7 - 24.9
CEILING CUTOUT	ø 9-5/8" (245 mm) Performance 1: ELV, 0-10V Performance 2: ELV, 0-10V Performance 3: ELV, 0-10V We invite you to consult frequently our Web site to find our suggested compatible dimmers (ELV) list: www.contrastlighting.com
DIMMING	
CERTIFICATION	cULus E343977 Certification for damp locations
WARRANTY	2 years

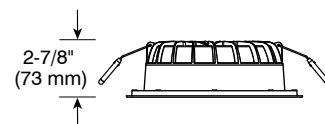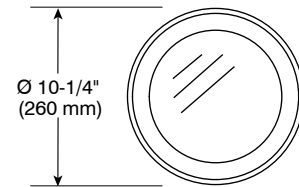

CONTRASTE

1009, rue du Parc Industriel
Lévis (Québec) G6Z 1C5 Canada
Tel.: 1-888-839-4624
Fax.: 1-877-839-7057
contrastlighting.com
info@contrastlighting.com


© 2017 Contrast Lighting M.L. Inc.
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

Drop

LED Recessed Downlight

DROP CODIFICATION EXAMPLE

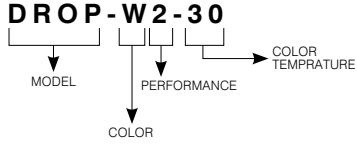

ORDERING CODE for Drop

MODEL	COLOR	PERFORMANCE	COLOR TEMPERATURE
DROP	W		30
DROP	W Matte White	1 2,040 lumens 2 3,140 lumens 3 3,930 lumens	30 3,000K